GFB 60 x 60 x 89 MM SERIES

* Bearing Type
  Ball Bearings
* Material
  Impeller & Frame : Plactic (UL 94V-0)
* Lead Wires :
  UL 1061 AWG #24 OR Equivalent
  Red And Orange Wire Positive (+)
  Black And Brown Wire Negative(-)
* Weight : 255g (8.99 OZ)

■ DIMENSIONS DRAWING

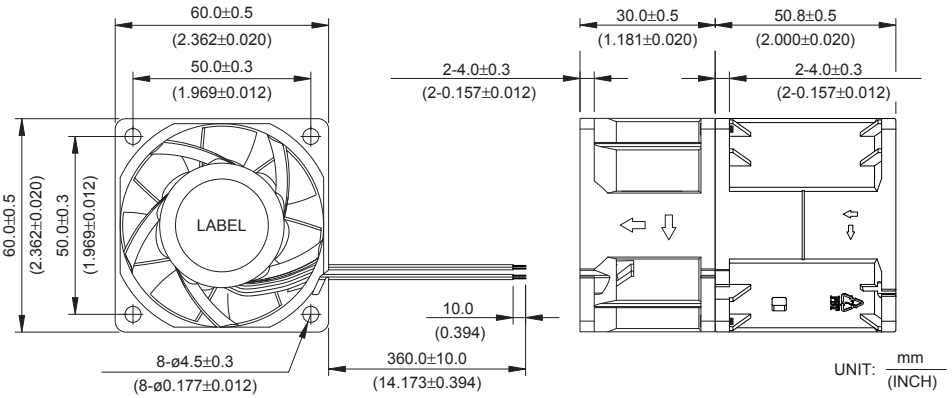

■ P & Q CURVE (AT RATED VOLTAGE)

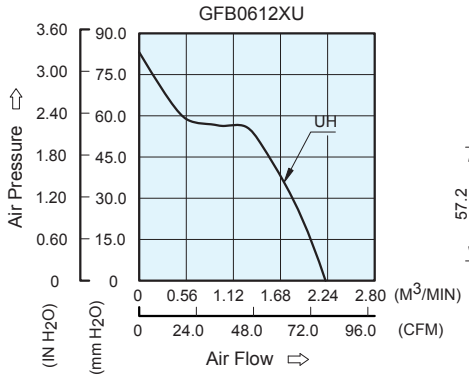

■ MOUNTING PANEL CUTOUT

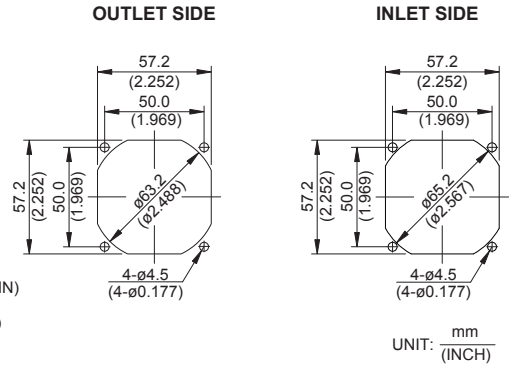

MODEL		Rated Voltage	Operating Voltage Range	Input Current	Input Power	Speed (Front/Rear)	Maximum Air Flow		Maximum Air Pressure		Noise
PART NO.	FUNCTION	VDC	VDC	Amp	Watt	R.P.M.	m^3 /min	CFM	mmH_2O	IN H_2O	dB-A
GFB0612UHU	-R00 / -F00	12	7.0 to 13.2	3.60	43.20	12200/12450	2.219	78.33	83.69	3.295	69.6

* Function type is optional.
* The max. air flow and the speed are measured in free air ; max. air pressure is measured at zero air flow.
* Noise is measured in anechoic chamber in free air, one meter from intake side.
* All readings are typical values at rated voltage.
* Specifications are subject to change without notice.